

Display D66

55x55 display for car and floor indicators with front fitted on plates with thicknesses from 1.5 to 3mm with snap-on connectors.

Two-digit with 7 segments or dot matrix and arrows 40mm high compliant with EN81-70 standard.

Floor sequence programming (from -9 to 19) and encoding (1/N, Binary) on board.

Red LED lighting.





FEATURES

Description: Two-digit + Arrows 7 segment display

Assembly: Front snaps on with connectors.

Power Supply: 9...30V

Display ● 60 mcd

Display ● 120 mcd

Polarity: Floor inputs (positive/negative - jumper selection)
Arrow inputs (positive/negative - jumper selection)

Configuration: Decimal

Power Supply Connection

One wire per floor connection (6 floors in sequence)

Arrow signal connections (down/up)

Binary

Power Supply

On-board floor sequence programming with



DIP switch (4 inputs - A, B, C and D)

Encoding: 1/N, one wire per segment, Binary, Gray (special programming on request)..


Dip switch for choosing on-board programming

Wiring: Screw terminals, connector terminal (on request).

External D66 Display Dimensions

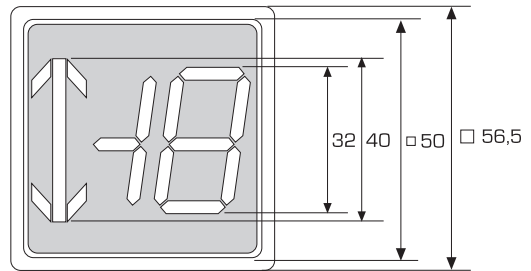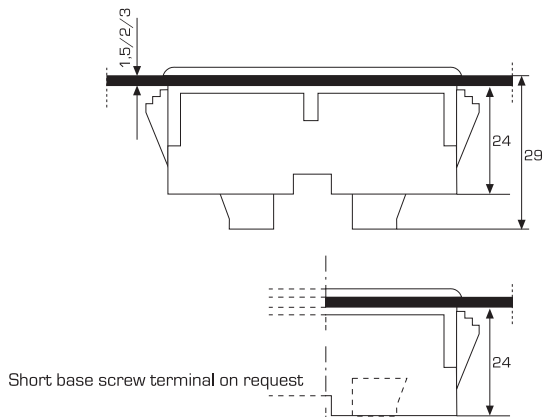

Electrical Binary/Decimal Display Connection

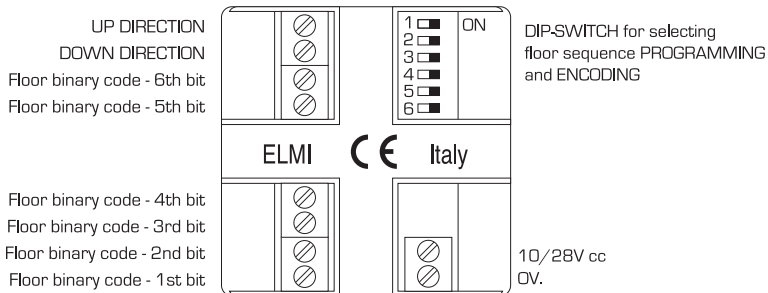

hole dimension on plate

